


Wide Dynamic FACE & FINGERPRINT Access Control Device

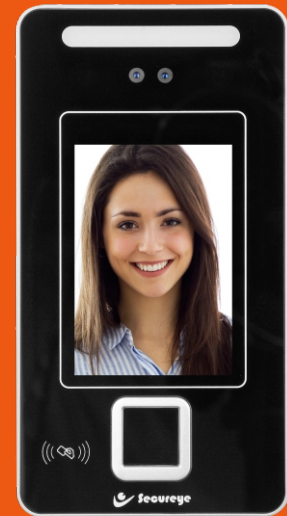

Features:

- 5 inch IPS High-Definition Display
- 10000 User/ Face Capacity
- 200,000 Recording Capacity
- 5000 Fingerprint Capacity

Specification	S-AIFACE10000
Processor	Dual Core A7-1.2GHZ
System	LINUX
Memory	512MB
Storage	8GB
Camera	1 million Binocular
User Number	Standard for 10000 People
Face Capacity	Standard for 10000 People
Fingerprint Capacity	5000 pieces
Password Capacity	1500 standard
Id Card	1500 standard (IC card can be customized)
Recording Capacity	200,000
Verification Mode	Face/ Fingerprint/ ID card / Password
Verification Speed	≤ 0.3 seconds
Display Method	5 inch IPS high-definition display (720*1280)
Touch Screen	Capacitive Touch Screen
Communication Mode	USB 2.0, U disk, 10M/100M adaptive, WiFi
Supported Languages	English (other languages can be customized)
Access Control Output	Wiegand 26/34, RS485, Door Sensor, Electric Lock, Door Button, Alarm, Doorbell
Power Supply	DC12V/2A
Use Distance	0.5 ~ 2 M (living distance 0.5 ~ 1 M)
Operating Temperature	- 30 °C ~ 60 °C
Operating Humidity	0 % ~ 90 %
Antistatic	Contact ≥4KV Air ≥8KV
Characteristic	Binocular vivo detection
Usage Environment	Indoor/ Semi-Outdoor

