


Bridge Type Swing Barrier

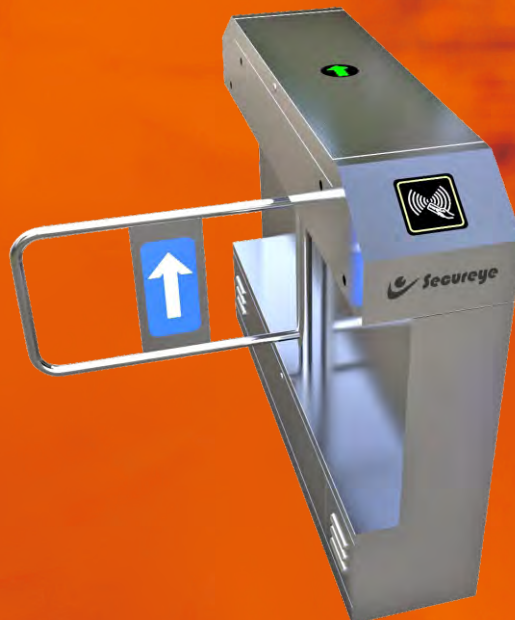

S-BB600 / S-BB1000

- Barriers made from stainless steel, acrylic glass, etc; Mechanical Anti-Pinch structure enable motor to stop working automatically in given time if there is something on the way during reset, and reset again after default time delay
- Human base model indication function, real time displaying, improve the passing rate and convenient maintain
- Anti pinch function, barriers auto open when power shut, insure user safety.
- Break-in ,tail ,over-pass and reverse alert function in order to keep orderliness and effective manage
- Super combination capacity, adjustable model on site
- Barriers move speed auto adjust with card reader, problem self-recovery, error calls function which could convenient users and operators
- Standard input/output port, meanwhile leaving a port space for installing RS485 communication, connect and manage the integrated systems through the remote PC.
- Turned up-coverage is water-proof and easy maintain .
- Open direction adjustable even though power off

Key Features

- Cabinet & Internal Structure is in 304 SS grade.
- Length of Swing Arm 600 / 1000mm
- Entering passing time in power 3 second
- Automatic resetting time after troubling 10 seconds
- Open & closing time 1 to 2 second
- Passing Speed 30-40 Person/Min.
- Transmission Angle of swing arm 90 degree
- Swing Direction (Single way/ Double way)optional
- Power Supply Ac220±10%
- Working Temp (-10°C to +60°C)



Specification

Specification

S-BB600

S-BB1000

Outside Housing Material	304 stainless steel
--------------------------	---------------------

Internal Structure	Steel frame structure
--------------------	-----------------------

Open Angle	90°
------------	-----

Power voltage	AC220 ± 10%, 50Hz
---------------	-------------------

Drive Motor	DC motor 24V
-------------	--------------

Open direction	Single & Double (Optional)
----------------	----------------------------

Gate opening and closing time	1 ~ 2 second
-------------------------------	--------------

Working Current	≤ 2000mA
-----------------	----------

IP Degree	IP55
-----------	------

Installation Place	Outdoor & Indoor
--------------------	------------------

Width of passage	1200mm	1000mm
------------------	--------	--------

Pass speed	30 ~ 40 Person / Minutes
------------	--------------------------

Operation condition	-10°C ~ 60°C
---------------------	--------------

