



2, 4 & 5MP H.264 Bullet IR Camera


S-WIR-2M / S-WIR-4M / S-WIR-5M



Key Features

- 1/2.9" Progressive scan CMOS
- WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- On-board storage, up to 128GB
- 3.6mm Fixed lens
- 6pcs Array LED
- Support Tripple stream
- Support Region of Interest(ROI)
- Support Defog
- Support NAS
- Support UPnP-TM
- Smart Functions

Dimension (mm)

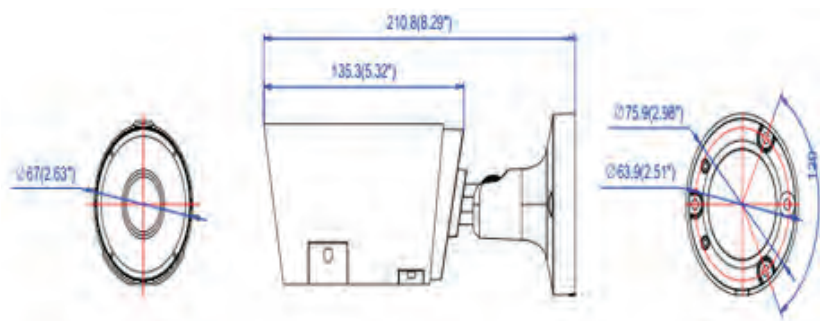

Supported Browser



IP Video Surveillance Solution

| Specification | S-WIR-2M | S-WIR-4M | S-WIR-5M | |
|---|---|--------------------|-------------------|-------------------|
| Camera | Image Sensor | | | |
| | 1/2.9" progressive scan CMOS | | | |
| | Min. Illumination | | | |
| | 0.1Lux/F2.6 (Color), 0Lux/F2.6(IR on) | | | |
| | Electronic Shutter Speed | | | |
| | Auto/Manual, 1/3~1/10000s | | | |
| Compression Standard | Day/Night | | | |
| | Auto(ICR) | | | |
| | Lens | | | |
| | 3.6mm @ F2.6, Angle of view: 74° | | | |
| | Max. IR LEDs Length | | | |
| | 20M | | | |
| Image | Video Compression | | | |
| | H.264 | | | |
| | H.264 Codec profile | | | |
| | Main profile | | | |
| | Video Bit Rate | | | |
| 32 Kbps~9 Mbps | | | | |
| Network | Audio Compression | | | |
| | G.711A | | | |
| | Max.resolution | 1920 *1080 | 2592*1520 | 2560*1920 |
| | Frame Rate Main Stream | 25fps (1920 *1080) | 25fps (2592*1520) | 25fps (2560*1920) |
| | Frame Rate Sub Stream | D1/CIF 25fps | | |
| | BLC | On/Off | | |
| Interface | ROI | | | |
| | Support | | | |
| | Defog | | | |
| | Support | | | |
| | Network Storage | | | |
| | NAS | | | |
| General | Alarm Trigger | | | |
| | Motion detection, Intrusion detection, Line crossing, Network Disconnect, IP address conflict, Storage exception | | | |
| | Protocols | | | |
| | TCP/IP, ICMP, HTTP, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, UPnP-TM, P2P | | | |
| | System compatibility | | | |
| Onvif 2.4,Profile S, CGI,Mobile Surveillance | | | | |
| General | Smart Phone | | | |
| | iPhone, Android | | | |
| | Communication interface | | | |
| | 1 RJ45 10M / 100M ethernet port | | | |
| | On-board storage | | | |
| Support Micro SD/SDHC/SDXC slot, upto 128GB | | | | |
| General | Audio I/O | | | |
| | 1/1 | | | |
| | Alarm I/O | | | |
| | 1/1 | | | |
| | Reset button | | | |
| Support | | | | |
| General | WDR | | | |
| | Supported | | | |
| | POE | | | |
| | Built in POE | | | |
| | Power Supply / Consumption | | | |
| DC12V ±10% / Max. 5W | | | | |
| Weather Proof & Protection Level | | | | |
| IP66 & IK10 | | | | |
| Operating Conditions | | | | |
| -30 °C ~ 60 °C, Humidity 95% or less (non-condensing) | | | | |



| www.secureye.com

