


High Speed Dome

36x CAMERA

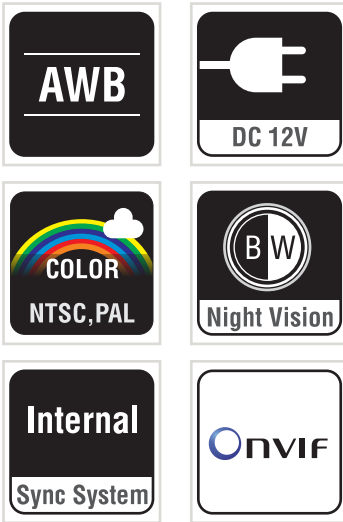

www.secureeye.com

KEY FEATURES

- 2MP Resolution
- 36x Optical Zoom
- 5-90mm Focal Length
- 150m IR Distance
- 255 Preset Position
- 360° Continuous Rotation
- 8 Cruise Track
- 4 Pattern Track

SPECIFICATION		SIP-HSD-2HD-36XM-SDALM
Camera	Signal model	PAL/NTSC
	Image sensor	1/2.8" CMOS
	Effective pixel	1920(H)x1080(V)
	Horizontal resolution	1080P
	Minimum illumination	Color:0.01Lux,B/W:0.001Lux
	S/N ratio	>60dB
	Backlight compensation	On/off
	White balance	Auto
	Electronic shutter	PAL:1/25~1/100000s NTSC:1/30~1/100000s
	Focus length	5-90mm
	Optical focus	36x
	Focus system	Auto/Manual
	IR distance	150m
	IR light control	Intelligent control technology
	IR light angle	Infrared zoom matching technology
	IR light power	Manual setting
	IR on	Day/Night/Auto/Timing
IR life	30000hours	
System	Horizontal range	360° Continuous rotation
	Vertical range	-90° ~0°
	Preset call speed	Max 200° /S
	Manual call speed	0.01° ~180° /S
	Presets	255
	Cruise track	8 groups, each group for 16 presets
	Patrol track	4 groups, each group record 3 mins
	Video compression	H.264 Main Profile encoding, MJPEG/JPEG Baseline encoding
	Audio compression	G.711, G.726
	Primary stream	1920 * 1080 25fps
Secondary stream	VGA, QVGA 25fps	
Video bit rate	32Kbps-16Mbps continuously adjustable, support CBR / VBR	
Network protocol	TCP/IP,UDP,RTP,RTSP,RTCP,HTTP,DNS,DDNS,DHCP,FTP,NT P,PPPOE,SMTP,UPNP	
General	ONVIF support	Support
	Cooling Structure	Dustproof structure outside the circle
	protection level	IP66
	Power supply	DC12V(4A)