



64 CHANNEL H.265+ NVR

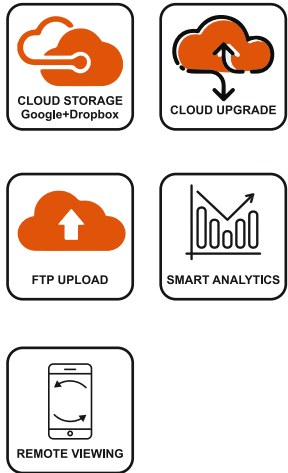

SPECIFICATION		SIP-9S-8HD-64
	Chipset	Hi3536
Video & Audio Input	IP Video Input	64ch
	Audio Input	Two Way Talk 1-ch, RCA
Video & Audio Output	HDMI	2ch, Resolution:4K(3840×2160)/30Hz,1920×1080/60Hz,1440×900/60Hz,1280×1024/60Hz, 1280×720/60Hz,1024×768/60Hz1CH HDMI only 1080P, the other one is up to 4K
	VGA	1ch, Resolution: 1920×1080/60Hz, 1440×900/60Hz, 1280×1024/60Hz, 1280×720/60Hz,1024×768/60Hz
	Audio Output	2-ch, RCA
Recording	Compression	H.265+/H.265/H.264+/H.264
	Resolution	8MP/5MP/4MP/3MP/1080P/720P/D1/CIF /QCIF
Playback & Backup	Playback Resolution	8MP/5MP/4MP/3MP/1080P/720P/D1/CIF /QCIF
	Decoding Capability	16ch@1080P
	Playback Mode	Smart Playback/Normal/Time Division/ Label/ Event/ Picture Playback
	Backup Mode	USB Device/Network/eSATA
Advanced Features	Smart Detection	Line crossing, Area Intrusion, Region Entrance, Region Exiting, Fast moving, Unattached Object, Object Missing, Face Detection
	Smart Playback	Face detection/Line Crossing/Are Intrution/Motion Detection
	Cloud Storage	Support
	Cloud Upgrade	Support
Network	Income Bandwidth	320Mbps
	Output Bandwidth	256Mbps
	Ethernet	2 x RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
	Network Function	HTTPs, HTTP, TCP/IP, IPv4, UPnP, RTSP,UDP, SMTP, SNMP, Multicast, NTP, DHCP, DNS, IP Filter, DDNS, FTP, P2P, ONVIF
	Smart Phone	IOS(iPhone, iPad), Android(Phone, Pad)
Hard Disk	SATA	8 SATA interface
	Capacity	Up to 8TB capacity for each HDD
External Interface	USB Interface	Front panel: 2 × USB 2.0 / Rear panel: 1 × USB 3.0
	eSata	1 x eSATA
	RS 485	2
	Alarm In	16-ch
	Alarm Out	4ch
General	Power Supply	AC 100~240V 30W
	Power Consumption	≤30W(without HDD)
	Working Environment	0°C~+55°C / 10%~90%RH
	Dimension (W×D×H)	440×452×90mm
	Weight	7.8kg

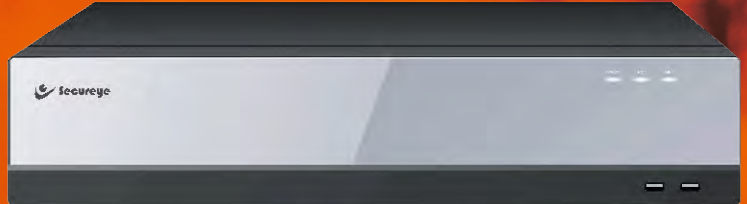

www.secureeye.com