


High Speed Dome

36x CAMERA

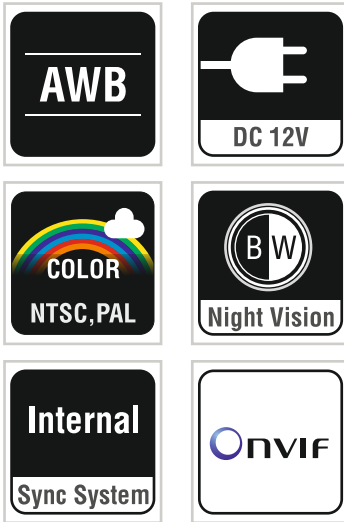

KEY FEATURES

- 3MP Resolution
- 36x Optical Zoom
- 4.6 ~ 165mm Focal Length
- 150m IR Distance
- 255 Preset Position
- 360° Continuous Rotation
- 8 Cruise Track
- 4 Pattern Track

SPECIFICATION		SIP-HSD-3HD-36XM-SDALM
Camera	Signal model	PAL/NTSC
	Image sensor	1/1.8" CMOS
	Effective pixel	2048(H)* 1536(V)
	Horizontal resolution	3 Megapixel
	Minimum illumination	Color:0.01Lux,B/W:0.001Lux
	S/N ratio	>60dB
	Backlight compensation	On/off
	White balance	Auto
	Electronic shutter	PAL:1/25~1/100000s NTSC:1/30~1/100000s
	Focus length	4.6 ~ 165mm
	Optical focus	36x
	Focus system	Auto/Manual
	IR distance	150M
	IR light control	Intelligent control technology
	IR light power	Auto setting
	IR on	Day/Night/Auto/Timing
	System	Horizontal range
Vertical range		-90°~0°
Preset call speed		Max 200°/S
Manual call speed		0.01°~180°/S
Presets		255
Cruise track		8 groups, each group for 16 presets
Patrol track		4 groups, each group record 3 mins
Video compression		H.265 Main Profile encoding ; MJPEG / JPEG Baseline encoding
Audio compression		G.711, G.726
Primary stream		2048*1536 25fps
Secondary stream		720P, VGA 25fps
Video bit rate	32Kbps-16Mbps continuously adjustable, support CBR / VBR	
Network protocol	TCP/IP,UDP,RTP,RTSP,RTCP,HTTP,DNS, DDNS,DHCP,FTP,NTP,PPPOE,SMTP,UPNP	
General	ONVIF support	Support
	protection level	IP66
	Power supply	DC12V(4A)



www.secureeye.com