


# 16 Channel XVR



Support Cloud Upgrade

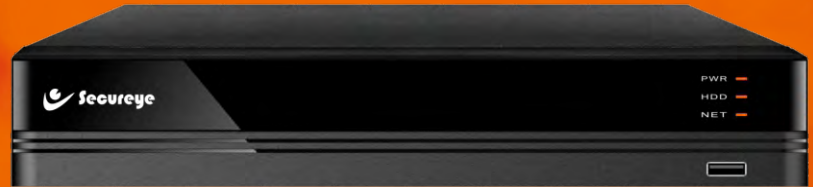

Google Drive & Dropbox



Event Stream



Instant Playback



AHD/TVI/CVI/CVBS/IP Camera Supported

## Features

- Support AHD / TVI / CVI / CVBS / IP Cameras
- Support AHD / TVI / CVI cameras up to 2MP
- Support H.264 / H.264+ / H.265+
- Support Time Division & Instant Playback
- Support Cloud upgrade
- Support Event stream



Specification	S-XVR-3	S-S-16C1H-4MDG
Chipset	Hi3521A	
Video Input	16ch BNC interface(1.0Vp-p, 75 Ω)	
TVI, AHD, CVI	1080P, 720P	
IPC	16ch 2MP	
CVBS	Support	
Audio Input	1-ch, multiplex with Audio Input	
Two way talk	1-ch, multiplex with Audio Input	
HDMI	1ch, resolution: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz	
VGA	1ch, resolution: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz	
Audio Output	1-ch,RCA (Linear,1kΩ)	
Compression	H.264/H.264+	H.265+
Resolution	16ch 1080P Lite@15fps; 960H1/D1/CIF real time	
Frame Rate(fps)	1fps-15fps	
Video Bit Rate	11Kbps-2707Kbps	
Record Mode	Manual, Schedule, Alarm	
Audio Compression	G.711a	
Audio Bit Rate	64Kbps	
Playback Mode	Normal/Time Division/ Label/ Event/ Picture Playback	
Playback Rate	16ch Playback	
Backup Mode	USB Device/Network	
Cloud Upgrade	Support	
Ethernet	1 RJ-45 10 /100 Mbps self-adaptive Ethernet interface	
Network Function	HTTPs,HTTP,TCP/IP,IPv4,UPnP,Onvif2.6,RTSP,RTCP,UDP,SMTP,IGMP, NTP,DHCP,DNS,DDNS, FTP, P2P	
Smart Phone	IOS(iPhone, iPad), Android(Phone, Pad)	
SATA	1 HDD	
Capacity	Up to 6TB capacity	Up to 10TB capacity
USB Interface	2 × USB 2.0	
Power Supply	DC12V,2A	
Power Consumption	≤10W(without HDD)	
Working Environment	-5°C~+55°C / 10%~90%RH	