


8 Port 10/100Mbps 2 Uplink GIGA POE SWITCH

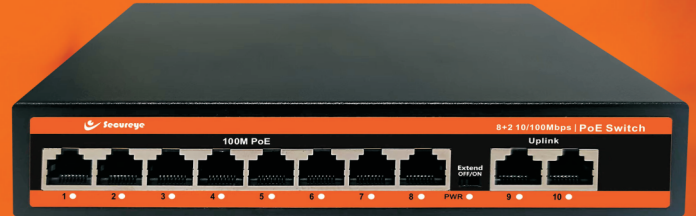

Features:

- 8*10/100Mbps PoE ports, 2*10/100Mbps uplink port
- Support IEEE802.3af/at
- Support restrain network storm, VLAN function
- Support Max Transmission distance up to 250m with PoE Power
- All port supported by MDI/MDIX auto flip and self-negotiation
- Built-in power supply
- Maximum power of single PoE port: 30 W
- Adopts store-and-forward architecture
- Fanless, natural cooling, small, compact and quiet design, suitable for desktop or wall
- Support lightning protection 2000V

Specification		S-8FE-2GE-LD-NB
Power	Power Adapter Voltage	AC 110V-240V
	Consumption	120W
	Power Position	Built-in Housing
Network Connector	PoE Ethernet Port	1 ~ 8 Port : 10/100Mbps
	Ethernet port	Uplink Port : 10/100Mbps
	Transmission Distance	1 ~ 8 Port : 100Mbps:0~100m 10Mbps: 0~250m, Uplink Port : 0 ~ 100m
	Transmission Medium	Cat5/5e/6 standard network cable
Network Switch	Network Standard	IEEE802.3/802.3u, IEEE802.3x, IEEE802.ab
	Switching Capacity	2.0Gbps
	Packet Buffer Memory	1Mbits
	Throughput	0.9Mbps
	MAC Table	1K
Power Over Ethernet	PoE Standard	IEEE 802.3af/at
	PoE Power Supply	End-Span(1/2+;3/6-)
	PoE Power	af=15.4W,at=30W for each port
RJ45 Port	Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
	LED Indicator	LINK/ACT.100Mbps; PoE Status Indicator; Power indicator; Extender
Environment	Working/Storage temperature	0°C~55°C / -20°C~70°C
	Relative Humidity	20~95%

