





Features

- 8*10/100/1000Mbps PoE ports,
 2*10/100/1000Mbps Ethernet port,
 2 SFP slot
- Support IEEE802.3af/at
- Support restrain network storm
- All port supported by MDI/MDIX auto flip and self-negotiation
- · Built-in power supply
- Maximum power of single PoE port: 30 W
- Maximum PoE power: 150W
- Support Non-blocking the bandwidth each PoE port can support 8MP camera
- Adopts store-and-forward architecture
- Fanless, natural cooling, small, compact and quiet design, suitable for desktop or wall
- Support lightning protection 4000V

The switch is a compact 8+2+2 port PoE switches, with 8 10/100/1000Mbps PoE Ports, and 2 10/100/1000Mbps Ethernet port and 2*SFP slot Port, The 8*PoE ports can automatically detect and provide power for any connected 802.3af /at Powered Device(PD), such as VOIP phones, IP Cameras, all PoE ports support the IEE802.3af/at standard, with a maximum output of 30 W each port


SPECIFICATIO	N	S-8GE-2UG-2UF-NB	
Power Adapter Voltage		AC 110V-240V	
Consumption		150W	
Network Port	PoE Ethernet Por	t 1~ 8 Port : 10/100/1000Mbps	
	Ethernet port	Uplink Port : 10/100/1000Mbps	
Optical Fiber Port		2*SFP slot	
Transmission Distan	ce	1~ 8 Port : 10/100/1000M: 0 ~ 100m	
		Uplink Port : 0 ~ 100m	
Transmission Mediu	m	Cat5/5e/6 standard network cable	
Network Standard		IEEE802.3/802.3u, IEEE802.3x,IEEE802.ab	
Switching Capacity		20Gbps	
Packet Buffer Memory		1Mbits	
Throughput		14.88Mbit	
MAC Table		2K	
Fording Model		Store -and -forward	
Data Package length	า	1518byte	
Full Wire Speed	Fu	Il wire speed transmission under full duplex mode	
Packet Forwarding F	Rate 1	OMbps:14880pps/port, 100Mbps:148800pps/port	
		1000Mbps:1488000pps/port	
PoE Standard		IEEE 802.3af/at	
PoE Power Supply		1/2(+), 4/5(+),3/6(-), 7/8(-)	
PoE Power		af=15.4W at=30W	
LED Indicator		Power indicator:keep bright when connect power	
	Netw	ork indicator:Flicker when there is data transmission	
Working temperature		0°C~55°C	
Relative Humidity		20~95%	





www.secureye.com

Storage temperature	-20°C~70°C	
Product Dimension	230mm*140mm*45mm (L×W×H)	
Color	Black	
Weight	1.16kg	
MTBF	>30000h	

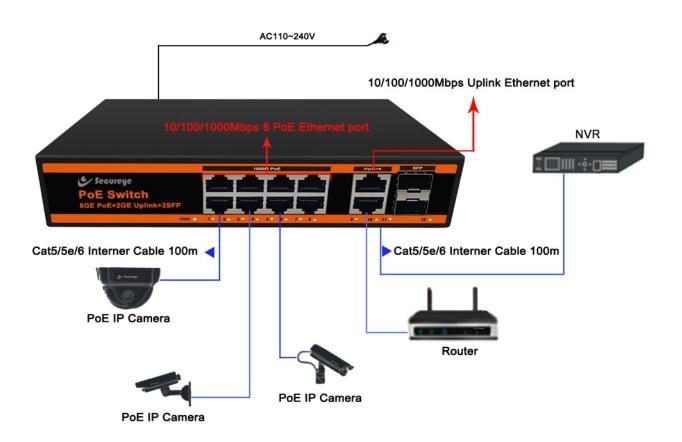





www.secureye.com